



No.UEV / 1343 of 2021

Mumbai - 400 032

Date: 16/04/2021

TENDER NOTICE

Wax sealed tenders are invited by the University Engineer, University of Mumbai for the following work:

- 1 Name of work : Providing and installing of 2 Ton 3 star Split Air Conditioners at Director of DSW V.V.Bhavan, University of Mumbai.
- Cost put to tender : Rs 71491 /- without GST.
- 3 Cost of Tender form : Rs. 224/- only
- 4 date for issuing of tender form : On 16/04/2021 before 11:00 AM
- 5 Last date of issuing and submission of tender form : On 23/04/2021 before 3:00 PM
- 6 Place and time for payment of tender form fees : University cash counter, Room no. 51, second floor, cash unit, Vidyanagari Campus Building.
- 7 Place and time of availability of 'Tender' : Office of University Engineer, Room No. 118, 1st floor, Fort Campus Building.
- 8 Place for submission of 'Tender' : Office of University Engineer, Room No. 118, 1st floor, Fort Campus Building.
- 9 Period within which work is to be done : 25 days
- 11 Defect liability period : 1 Year

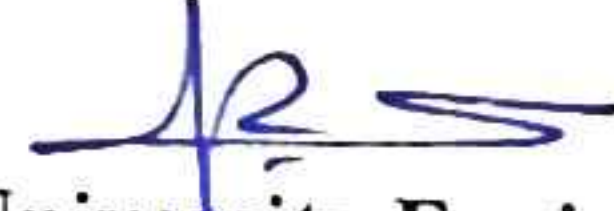
The blank tender form (Schedule "B") must be submitted and details such as (i) Tender Fee Receipt No. & Date must invariably be written on it.

The contractor in the field should be PWD registered. Any over writing in tender document leads to rejection of tender.

Please note that, if any damages are done to electrical wiring, cabling etc. and internal, external pipeline during the repairing work shall be rectified / replaced by the contractor immediately at his own expense.

The selected contractor will have to execute an agreement on Rs 500/- stamp paper, University of Mumbai will not be responsible for any postal delay/loss in transit.

University Engineer, University of Mumbai reserves the right to reject all the tenders or any tender without assigning any reasons therefore and to relax or waive any of the condition stipulated in any of the tender that may be issued wherever necessary.


University Engineer
University of Mumbai.



UNIVERSITY OF MUMBAI

ESTIMATE

Nature of Work: Providing and installation of 2 Tonn Air conditioners at Director Room
Sunil Patil (DSW Director) , Church ate University of Mumbai.

Item No.	Qty	Description Of Item	Rate	Unit	Amount
1.	1Nos.	Supplying, installing, testing and commissioning split type variable speed inverter technology room air conditioning unit 2 TR capacity having ISEER minimum 3.50 to 3.99 suitable to operate on 250V, 50 cycles, A.C. supply having 1 no. of air handling unit hi-wall/floor mounting type complete with refrigerants R410A/ r 32 and copper condenser at position. Specification no. APAC/SAC (3-2-6)	58201.00	EACH	58201.00
2.	14	Supplying & erecting soft drawn copper pipe suitable for refrigeration system having 22 SWG thickness and inner dia/size 12mm complete (3-2-15)	272.00	Meters	3808.00
3.	14	Supplying & erecting soft drawn copper pipe suitable for refrigeration system having 22 SWG thickness and inner dia/size 16mm complete (3-2-16)	374.00	Meters	5236.00
4.	14	Supplying and erecting elastomeric nitrile rubber/ foam tube types sleeves for over coating and insulating copper pipes having 9mm thickness and inner dia size 12 mm (4-2-15)	63	Meters	882.00
5.	14	Supplying and erecting elastomeric nitrile rubber/ foam tube types sleeves for over coating and insulating copper pipes having 9mm thickness and inner dia size 16 mm (4-2-16)	72	Meters	1008.00
6.	14	Supplying and erecting PVC insulated PVC round sheathed 2.5 sq.mm. (50 no. x 0.25mm dia) 3 core flexible multi stranded copper industrial cable for voltage grade upto 1.1kV (1-3-28)	80	Meters	1120.00

Item No.	Qty	Description Of Item	Rate	Unit	Amount
7.	12	Supplying & erecting HMS PVC conduit 25 mm dia with necessary accessories in wall/faloor with chiseling appropriately as per specification No. WG-MA/CC (1-1-9)	103	Meters	1236.
Total					71491.
GST @ 12 %					8579.
Total					80070.0

Pratik

[Signature]
University Engineer
University of Mumbai